


PRODUCT DATA SHEET

Airflow regulator Ø 75 VRP75-10G

	Ø1	Ø2	Z
VRP75	70	59	8,1

Number of removed rings	Air flow velocity [m³/h]					
	10	20	30	40	50	60
	Pressure drop [Pa]					
0	9,0	31,6	69,1	119,8	186,2	269,3
1	6,0	21,4	45,9	81,3	126,9	183,0
2	3,3	12,2	26,8	46,6	71,7	104,7
3	1,5	5,8	12,9	22,7	36,1	53,5
4	0,4	1,8	3,9	7,1	11,1	17,0
5	0,2	0,5	1,0	1,9	2,9	4,0

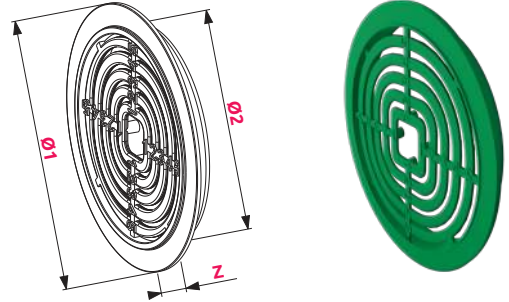

Coupling VM75, VM90

The couplings provide fast, durable and break-resistant duct connections.

Available diameters: Ø75, Ø90



End caps Z75-5, VZ90-5

End caps protect ducts from any contamination during transport, storage and the system from possible contamination during installation.

Available diameters: Ø75, Ø90



Gaskets VU75-5, VU90-5

Specially designed gaskets ensure a tight connection between ducts as well as between duct and manifolds and plenum boxes.

Available diameters: Ø75, Ø90



Duct cutter Ø 75, 90 VNK75R, VNK75G, VNK90R, VNK90G

A cutter for ducts with a diameter of 75-90 mm, with replaceable blades.

Available diameters: Ø75, Ø90



Mounting tape, perforated VTM

It is ideal for installations requiring smooth height adjustment or when there is no possibility to use clamps.

Mounting openings of Ø 4 mm and 8 mm



Tape for the VZO band clamp

The metal tape allows you to create band clamps of any diameter. Special packaging makes it easy to measure the desired lengths of tape


Width: 9 mm, thickness: 0.6 mm, Length: 30 mb.



Sealing tape VTA (aluminium), TTZ (reinforced)

Sealing tape is used to protect connections from possible leaks.

Available diameters: Ø75, Ø90



Duct holder Ø 75 VH75-2

Duct holder with a diameter of 75 mm. The holder allows you to instal the ducts both on the floor and the ceiling.

