

VEGA



230 V 50 Hz Ø100		12 VDC Ø100 (WGB100VDC)		230 V 50 Hz Ø125		230 V 50 Hz Ø150	
36 dB(A)*	95 m³/h	38 dB(A)*	88 m³/h	39 dB(A)*	180 m³/h	43 dB(A)*	225 m³/h
13 W	38 Pa	4 W	35 Pa	15 W	50 Pa	17 W	48 Pa

	m³/h				W				Pa				dB(A)*			
	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
WGB100CTR	40	75	85	95	5	7	9	14	10	26	32	38	19	31	34	36
WGB125CTR	50	80	120	180	5	7	10	16	5	10	20	50	19	26	31	39
WGB150CTR	80	128	180	225	6	9	12	18	5	9	15	48	22	30	39	43



GŁÓWNE CECHY


MAIN FEATURES

- **tworzywo ABS**
ABS plastic
- **łożyska kulkowe**
ball bearings
- **IPX4**
IPX4
- **maksymalna temperatura pracy 40°C**
maximum operating temperature 40°C
- **montaż ścienny**
wall installation
- **możliwość instalacji na suficie (dotyczy wersji WGB100V)**
ceiling installation allowed (applies to WGB100V version)
- **5 lat gwarancji**
5 years warranty
- **możliwość zainstalowania zaworu zwrotnego (ZZ)**
non-return valve (ZZ) usage ability

WYMIARY

DIMENSIONS

	Ø	A	B	X	Y	W	Z
Ø100	100	109	109	140	140	95	77
Ø125	125	137	137	172	172	95	77
Ø150	150	162	162	201	201	104	83

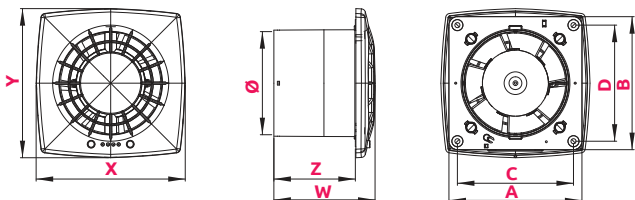

WYPOSAŻENIE

EQUIPMENT



	INDEX				
Ø100	WGB100	●			
	WGB100W		●		
	WGB100T			●	
	WGB100H			●	●
Ø125	WGB100CTR			●	●
	WGB100VDC	12v			
	WGB125	●			
	WGB125W		●		
Ø150	WGB125T			●	
	WGB125H			●	●
	WGB125CTR			●	●
	WGB150	●			
Ø150	WGB150W		●		
	WGB150T			●	
	WGB150H			●	●
	WGB150CTR			●	●

* Wartość ciśnienia akustycznego z odległości 3m
* Sound pressure value from a distance of 3m